


PRODUCT INFORMATION

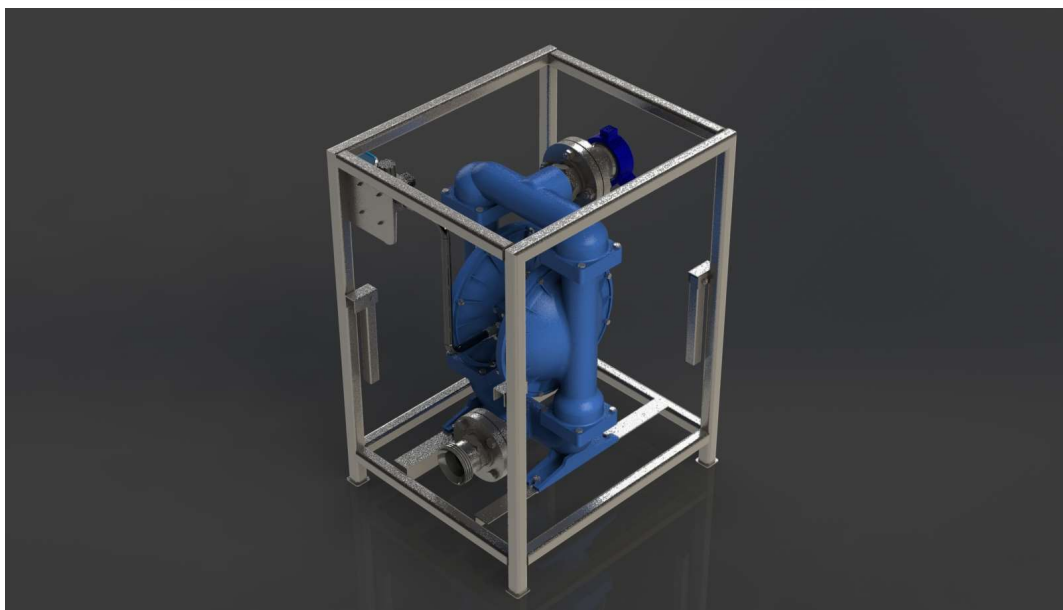

<u>Technical Specification</u>	
Suction / Discharge Port Size (OPTIONS)	• 3" NPT (internal) • 3" BSP Tapered (internal) • 3" ANSI 150# Raised Face Flanges
Heads up to	• 125 psi or 289 ft. Of water (8.6 Kg/cm2 or 86 meters)
Capacity	• 0 to 200 gallons per minute (0 to 758 LPM)
Maximum Operating Pressure	• 125 psi (8.6 bar)
Displacement / Stroke	• .46 Gallon / 1.7 liter
Air Distribution Valve	• No-lube, no-stall design
Solids Handling	• Up to .38 in. (9.65mm)
Crash Frame Material	• SS316 Stainless Steel
Overall Dimensions (L x W x H)	• 1025mm X 760mm X 695mm
Weight (empty)	• 108 Kg. W / Crash Frame

NOTE:

Official Equipment Manufacturer (OEM) is Sandpiper.


Scottech Oilfield Services

32 Remisko Drive,
Forrestdale WA 6112

Tel. No.:+61 (0) 8 9399 5444
E-mail : info@scottech.net.au

Website: <https://www.scottech.net.au>

Performance Curve

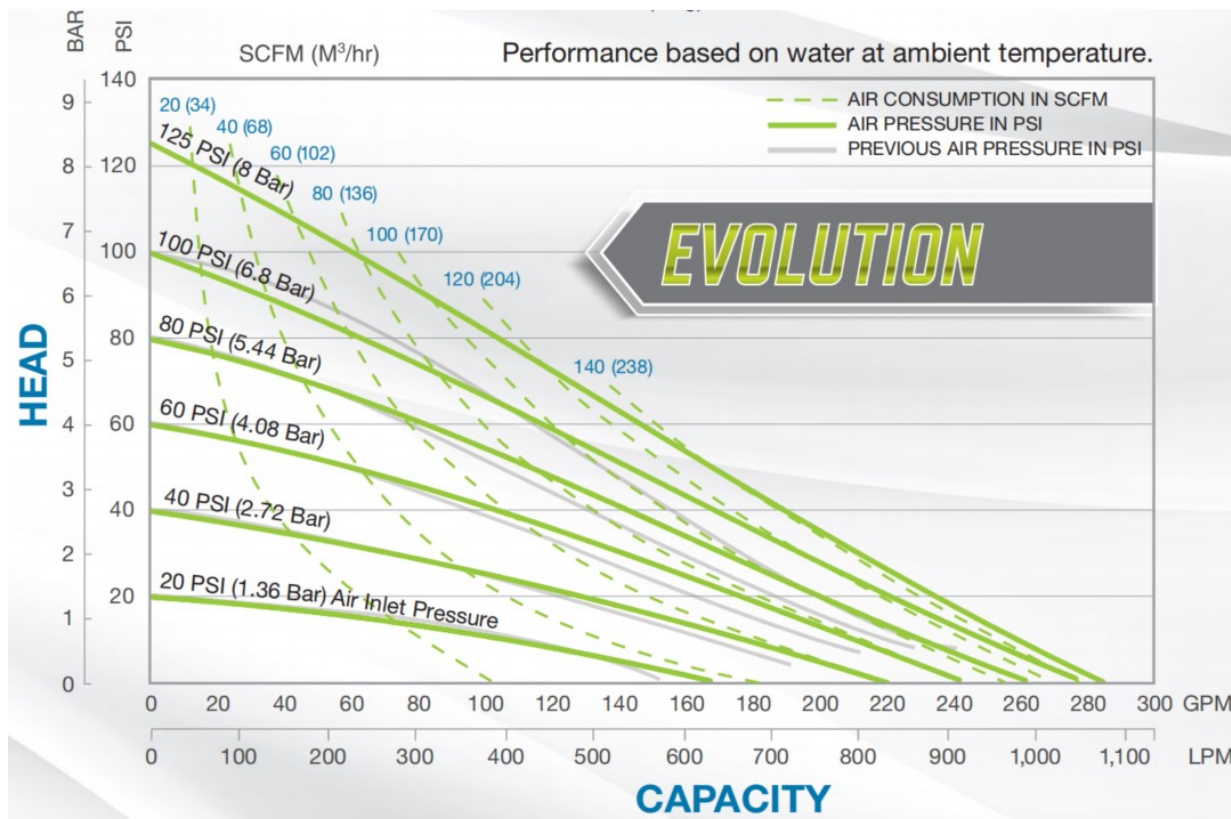

GENERAL ARRANGEMENT DRAWING

